



COOL WEATHER

Premium Quality Full Acrylic Exterior Wall Finish



- Excellent durability and color fastness
- Fungus and algae resistant
- Dirt resistant
- UV resistant
- Reduce surface temperature





MODERN EXTERIOR WALL PAINTING SYSTEM

A With Elastomeric Waterproofing Feature
具伸缩性/防裂痕/防水特效功能



LESS 1 COAT

NEW

1 COAT



+

1 COAT*



OR

ADVANCE EXTERIOR WALL PAINTING SYSTEM

B Long Lasting Exterior Wall Protection
具强效墙净技术/颜色鲜艳亮丽/持久防护功能

1+2 : 3 COATS



1 COAT



+

2 COATS*



GREEN SEALER
850

COOL WEATHER

SAVE Up to **30%** of **PAINT TIME MONEY**

EXCELLENT WALL PROTECTION

*For some bright / brilliant colour finishing coat may require more than 1 coat.

*选择色彩鲜艳的晴雨漆须涂多过1层。

PREVENT **MENGELAKKAN**
强效预防



NO MORE



ALKALI ATTACK

NO MORE



DISCOLOURATION
DUE TO
RISING DAMP

NO MORE



DISCOLOURATION
DUE TO
WALL CRACK

NO MORE



EFFLORESCENCE

NO MORE



PAINT PEELING

NO MORE



FUNGUS GROW

COOL WEATHER

Premium Quality Full Acrylic Exterior Wall Finish



SPRM
Certified To MS134:2007
Certification No.: PC001109




SPRM
ECO-LABEL
Certification No.: EL000037



Lettuce

9149



Ivory

9602



Grazing Field

AP111-3



Cream

9140



Mandarin Field

9565



Sunset

9254



Rye

9663



Tangerine

9806




Yellow Cluster

AP153-1



All Gold

9212



Banana

9138



Heath Yellow

AP58-1



Yellow Jasmine

AP59-4



Monza

9715



Citron Ice

9147



Sun Drenched

AP102-2



Teton Gold

AP167-4



Tenaga Red

9005




Colourland Yellow

9696



Summer Daisy

9120



Waterfall

9416



Thunderball Red

9113



Cheese

9640



Daffodil

AP101-5



Tanzania

9598



Purple Dawn

9288



Desert Fire

9152



Canary

9253



Kenyan Leaves


9599



Dauphine Red


AP89-4

Also available in 9004 White & 9003 Black




Violet Whisper

AP9-1



Purple Lint

9083




Walden White

AP14-4



McClendon

9926



Evening Breeze

AP13-3



Burmese Beige

9729



Vanilla

9704



Zambezi Rocks

9566




Sand Stone

9653




Bran

9721



Blue Trace

AP10-1



White Whale

AP51-1



Carmel

9533



Platinum

9307



Blue Chiffon

9131



Victorian Gray

AP53-3



Vistasik Brown

9655



Tenaga Grey

9007



Blue Sky

9256



Moonless

AP18-6



Monterrey

9662



Fog Grey

9988



Wira Blue

9221



Quaker Gray

AP128-6



Cocoa Mix

9664



Ominous

9989



Tenaga Blue

9006



Lake Stone

9726




Native Soil

9124



Dawn Grey

9747

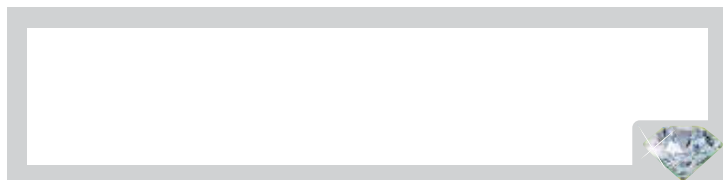

Diamond White 9001



ROOF MAX

Anti Fungus Acrylic Roof Finish



- Excellent color fastness
- Resistant to efflorescence and alkali attack
- Superior dirt shedding property
- Fungus and algae resistant
- UV resistant



Orange

9650



Impian Red

9521



Texas Brown

9505



Istana Maroon

9522



Crayon

9144



Casa Blue

9445



Rimba Green

9417



Shadow Grey

9670

COOL WEATHER

Premium Quality Full Acrylic Exterior Wall Finish



SMART COOL WEATHER

SMART COOL WEATHER is specially formulated for tropical weather. This product helps to reflect the heat and at the same time offer a better thermal comfort environmental conditions and energy saving. **SMART COOL WEATHER** is formulated with 100% acrylic, which provides a tough finish and high level of durability against harsh weather. Besides, it is a high performance exterior wall finish specially formulated to provide at least 6 years of protection against unsightly fungi and algae growth. It can also withstand the scorching sun and torrential rain. **SMART COOL WEATHER** breakthrough formula provides a tougher resistance against dirt, fungus, flaking and alkali attack.

表面处理

确保表面干净, 使用硬刷及用水冲洗或以喷射法除掉松脱的漆片, 用除霉液处理受霉、真菌和苔藓侵袭的表面, 待干后才上漆。使用适合的漆泥修补小缺陷。为了取得最佳效果, 请先涂上一层 **SMART High Performance Sealer 900** 或 **SMART Green Sealer 850** 或 **SMART Wall Sealer 800** 然后再涂两层 **SMART COOL WEATHER**。

注意: 别在潮湿的天气油刷 **SMART COOL WEATHER**。

施工资料

手触干度: 视气温和湿度而定
髹次层漆: 相隔一至两个小时
髹扫面积: 每公升十一至十三平方公尺
层数: 两层

用法

髹扫用具: 使用前需彻底搅均, 可用漆扫, 滚轴涂刷或喷射。
调稀: 通常不必调稀。如果需要调稀, 用不超过10%的清水。
清理: 髹漆工作完成后即刻用清水洗净用具。

配方

H₂O, Polymer, CaCO₃, TiO₂, Surfactants, Preservatives, Pigments and Defoamer.

危险

如果触及皮肤或误吞会造成呼吸困难。

安全

- 避免触及眼睛。
- 不可丢弃于沟渠。
- 避免吸入过多气体。

SMART COOL WEATHER

SMART COOL WEATHER dirumus khas untuk cuaca tropika. Produk ini membantu memantulkan haba dengan menyediakan pengaliran udara panas yang lebih baik seterusnya menawarkan keselesaan dalam rumah serta penjimatan tenaga. **SMART COOL WEATHER** berasaskan 100% akrilik dan ia dapat menyediakan pertahanan yang kuat terhadap cuaca yang panas terik. Selain itu, ia adalah kemasan dinding luar yang berprestasi tinggi dan dapat memberi sekurang-kurangnya 6 tahun perlindungan daripada pertumbuhan kulat dan rumpai air. **SMART COOL WEATHER** tahan kepada panas terik matahari dan hujan lebat. Ia juga memberi perlindungan yang kuat terhadap kotoran, kulat dan serangan alkali.

Penyediaan Permukaan

Pastikan permukaan yang hendak dicat bersih. Buang segala cat mengelupas atau sisa berserbuk dengan berus atau kikir dengan berus sabut keras dan air atau pancutan air yang mempunyai tekanan tinggi. Rawati bahagian yang terjejas akibat kulat, liken, rumpai air atau lumut. Biarkan kering sebelum mengecat. Baiki kerosakan kecil dengan filler luaran yang sesuai. Untuk hasil yang cemerlang, sapu satu lapisan **SMART High Performance Sealer 900** atau **SMART Green Sealer 850** atau **SMART Wall Sealer 800** diikuti dengan 2 lapisan **SMART COOL WEATHER**.
Perhatian: Jangan sapu kemasan dinding luar dengan **SMART COOL WEATHER** dalam cuaca lembap.

Data Penggunaan

Kering Sentuh: Bergantung kepada suhu dan kelembapan
Ulang Cat: 1-2 jam
Liputan: 11-13m²/ liter
Bilangan Lapisan: 2 lapisan

Cara Penggunaan

Cara Menggunakan: Kacau sehingga sekata sebelum menggunakannya. Cat ini boleh disapu dengan berus, pengelek atau penyembur.
Pencairan: Untuk kegunaan biasa, pencairan lazimnya tidak perlu. Jika perlu, cairkan dengan maksimum 10% air.
Pencucian: Cuci perkakas dengan air bersih sebaik sahaja selesai kerja.

Bahan-bahan

H₂O, Polymer, CaCO₃, TiO₂, Surfactants, Preservatives, Pigments and Defoamer.

Awas

Merbahaya jika ditelan, bersentuhan dengan kulit ataupun disedut.

Langkah-langkah Keselamatan

- Elak daripada bersentuhan dengan mata.
- Jangan tuang kandungan cat ke dalam longkang.
- Jangan sedut wap cat ini.

SMART COOL WEATHER

SMART COOL WEATHER is specially designed for tropical weather. This product helps to reflect the heat and at the same time offer a better thermal comfort environmental conditions and energy saving. **SMART COOL WEATHER** is formulated with 100% acrylic, which provides a tough finish and high level of durability against harsh weather. Besides, it is a high performance exterior wall finish specially formulated to provide at least 6 years of protection against unsightly fungi and algae growth. It can also withstand the scorching sun and torrential rain. **SMART COOL WEATHER** breakthrough formula provides a tougher resistance against dirt, fungus, flaking and alkali attack.

Surface Preparation

Ensure the surface to be painted is clean. Remove all loose paint or powdery residue by brushing or scraping with a stiff brush under running water or with a high pressure water jet. Treat areas affected by mould, lichen, algae or moss with fungicidal wash and allow them to dry before painting. Repair minor defects with a suitable exterior graded filler. For best results, apply 1 coat of **SMART High Performance Wall Sealer 900** or **SMART Green Sealer 850** or **SMART Wall Sealer 800** followed by 2 coats of **SMART COOL WEATHER**.

Note: Do not apply **SMART COOL WEATHER** in damp weather.

Application Data

Touch Dry: Dependent on temperature and humidity
Recoat: 1-2 hours
Coverage: 11-13m²/ litre
No. of Coats: 2 coats

Direction For Use

Application: Stir well before use. Application can be carried out by using brush, roller or spraying.
Thinning: Use directly or dilute with a maximum of 10% water.
Cleaning Up: Clean all equipment with clean water immediately after use.

Ingredient

H₂O, Polymer, CaCO₃, TiO₂, Surfactants, Preservatives, Pigments and Defoamer.

Warning

Harmful by ingestion, and when in prolonged contact with skin or inhalation.

Safety Measures

- Avoid contact with eyes.
- Do not empty into drains.
- Do not breath vapour/spray.



WATER BASE



EXTERIOR



ROLL ON



BRUSH ON



SPRAY ON



ALGAE & FUNGUS RESISTANT



1-2 HOURS RECOAT



SMART PAINT MANUFACTURING SDN BHD (reg. 1031014-A)

No. 9 & 11, Jalan Indah Gemilang 5, Taman Perindustrian Gemilang,
81800 Ulu Tiram, Johor, Malaysia.

Tel : 07-863 9855

Email : info@smart-paints.com Website : www.smart-paints.com



BUATAN MALAYSIA

