



FACING WALL DAMPNESS PROBLEM

您面对令人头疼的壁癌问题吗

DAMPNESS PROBLEM


水分由下至上



水分由内至外





水分由外至内

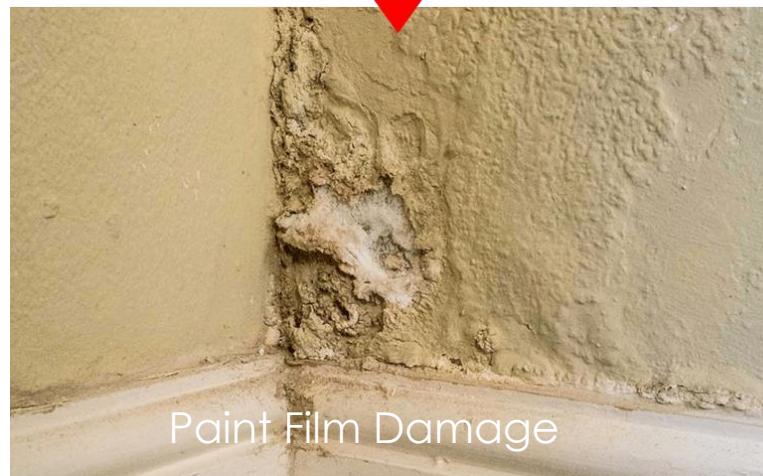

WALL DAMPNESS PROBLEM

墙体潮湿/碱的来源 – 照成的漆面影响

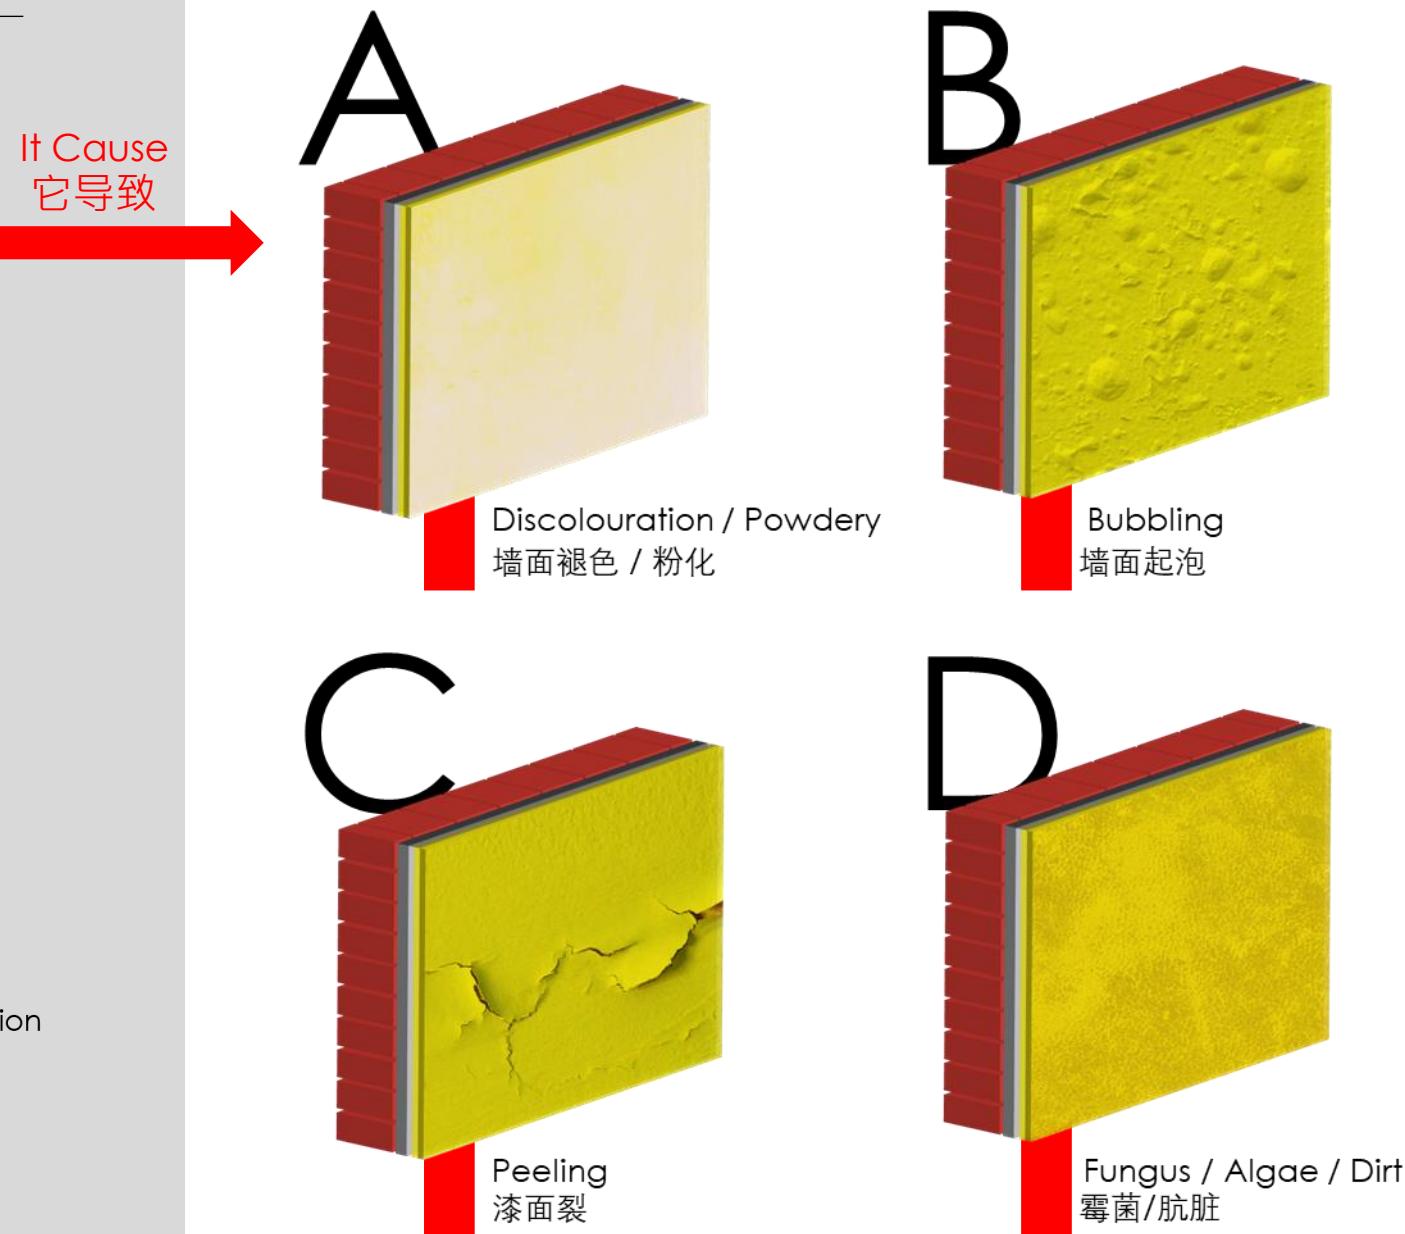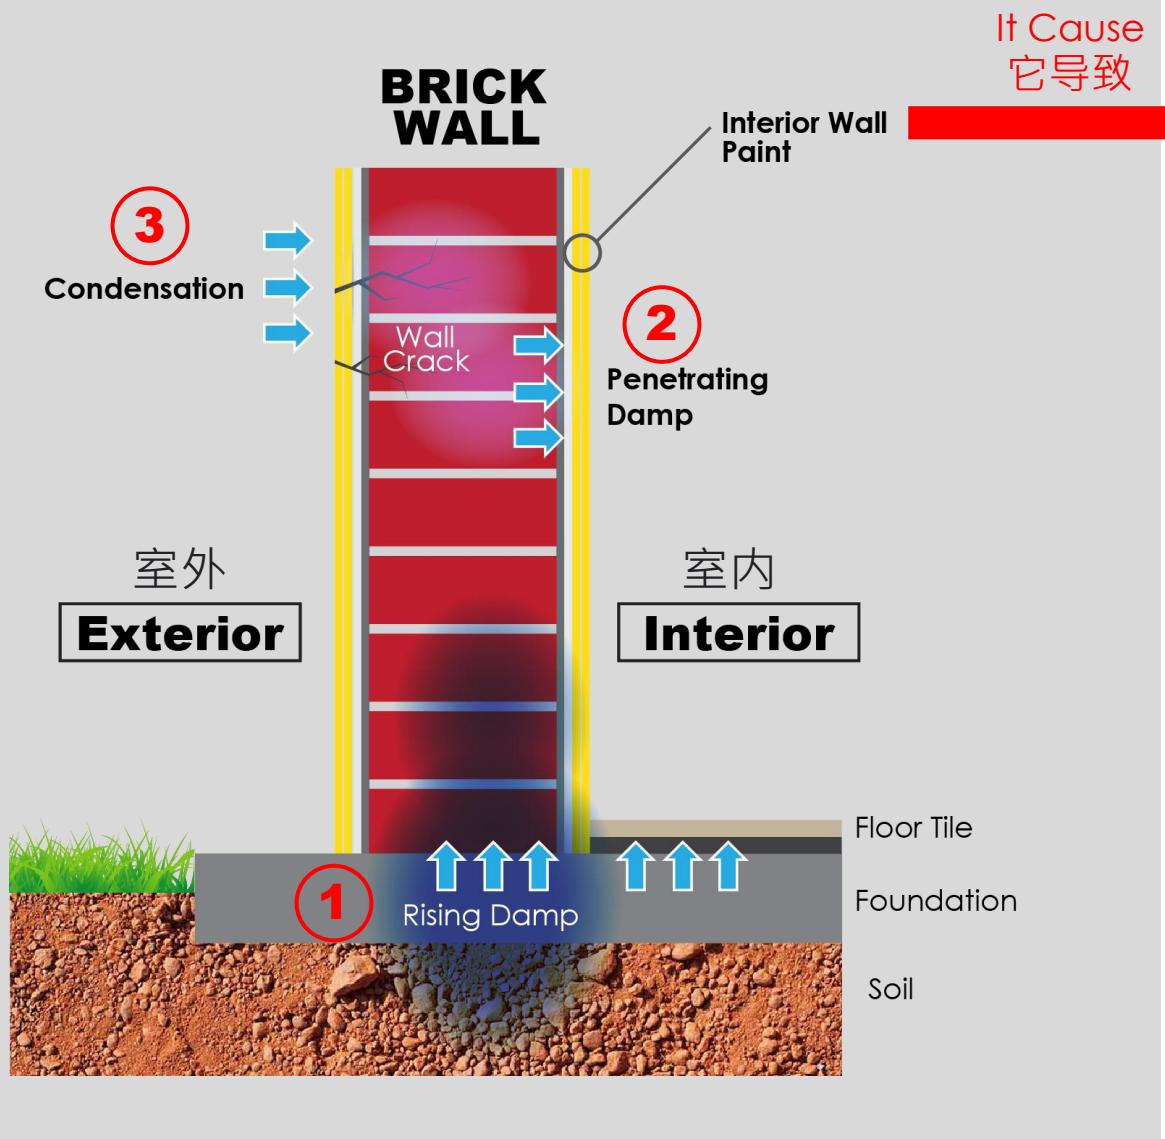

Smart®
Paints

NEW
全新
★★★★★



Part A : 4.15L



Part B : 0.85L

5L /Set

WALL DAMPNESS SOLUTION

墙面防潮解决方案



墙面防潮解决方案

WALL DAMPNESS SOLUTION

2K WATER-BASED EPOXY
DAMP SEALER
MOISTURE BARRIER COATING



水性2K EPOXY防潮涂层

强效抗湿气防护
(可防护墙面漆或地坪漆)



适用于室内或室外使用

超强附着力



白色底漆
可使用任何类型漆料
涂于其表面
(水性或油性涂层体系)

超强抗碱功能
(可防护墙面漆或地坪漆)



超强抗风化功能
(可防护墙面漆或地坪漆)

强效预防表面涂层
因墙碱或墙内湿气
照成的漆面龟裂



强效预防表面涂层
因墙碱或墙内
湿气照成的漆面
脱落或壁癌



2K WATER-BASED EPOXY

DAMP SEALER

MOISTURE BARRIER COATING



Exterior & Interior Use



Exterior & Interior Use



Excellent Protection



For Wall & Floor



Excellent Protection



Excellent Adhesion



Can Recoat With Any Paint



Alkali Resistant




Efflorescence Resistant



Prevent Paint Cracking



Prevent Paint Peeling

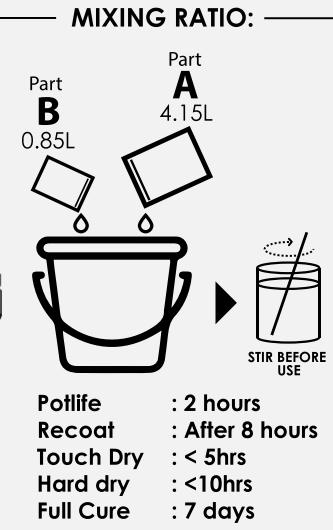

产品需在混合后，2小时内使用。
避免硬化，造成浪费。

Product User Guide

产品使用解说

Dampness Wall Solution

墙面问题

Step 1

表面准备工作




- 1A. 使用刮刀清除问题漆面，使将上漆的表面保持干净, 无粉尘和无脱落漆片。
- 1B. 如果表面还有粉化迹象, 请使用抹布抹掉其表面的粉末。



Part
A
4.15L

Part
B
0.85L

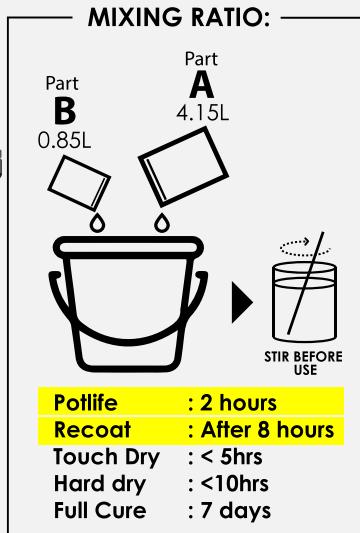

- 2A. 把**Smart Paints 2K Water-Based Epoxy Damp Sealer** - Part A (4.15L)和Part B(0.85L)
*混合一起。(搅拌均匀)
- 2B. *需在产品混合后(Part A + Part B), 在2和小时内
快速使用。避免照成浪费。

注意:

- 请勿施工于阴天或雨天，避免对产品性能造成影响。
- 尽可能施工于天气晴朗的早上，能令产品发挥最大功效。

Step 2

产品准备

Step 3

施工-1层



- 3A. 将混合好的**Smart Paints 2K Water-Based Epoxy Damp Sealer**均匀的涂抹于问题漆面。
- 3B. 置放8小时使其漆面干透。便可油上您所需要的颜色面漆(2层)。

Problem Wall

Step 1

Surface Preparation



- 1A. Use a scraper to remove any problem paint surface, ensuring that the surface to be painted is clean, free from dust, and has no loose paint flakes.
- 1B. If the surface shows signs of powdering, wipe it with a cloth to remove any surface powder.

Step 2

Product Preparation



MIXING RATIO:

Part A	4.15L
Part B	0.85L
Stir Before Use	
Potlife	: 2 hours
Recoat	: After 8 hours
Touch Dry	: < 5hrs
Hard dry	: <10hrs
Full Cure	: 7 days



- 2A. Mix Smart Paints 2K Water-Based Epoxy Damp Sealer - Part A (4.15L) and Part B (0.85L) together. (Stir Well)
- 2B. After the product is mixed (Part A + Part B), use it quickly within 2 hours to avoid wastage.

Note:

- Do not apply on cloudy or rainy days to avoid affecting the product performance.
- Try to apply on a clear morning for the best results.

Step 3

Apply 1 Coat

- 3A. Apply the mixed Smart Paints 2K Water-Based Epoxy Damp Sealer evenly on the surface to be painted.
- 3B. Leave it to dry for 8 hours before applying your desired color topcoat (2 coats).



Part A : 4.15L

Part B : 0.85L

WALL DAMPNESS SOLUTION

墙面防潮解决方案



强效防潮
保护漆面